

CULINARY WATER PLAN

IRRIGATION WATER PLAN

PROVIDE 12" FIBER REINFORCED CONCRETE COLLAR

CONCRETE TO BE SET ¼" MIN. TO ½" MAX. BELOW ASPHALT LIP

PROVIDE STANDARD CAST IRON VALVE BOX LID MARKED AS REQUIRED SHOWN BELOW


PROVIDE 12" THICK FIBER REINFORCED CONCRETE COLLAR

ROAD SURFACE

UNTREATED BASE COURSE

PROVIDE 14-GAUGE TRACER WIRE TEST FOR CONTINUITY. SEE PLAN 381R FOR VALVE BOX TRACER WIRE.

INSTALL CONCRETE SUPPORTS UNDER ALL TRAFFIC BOXES

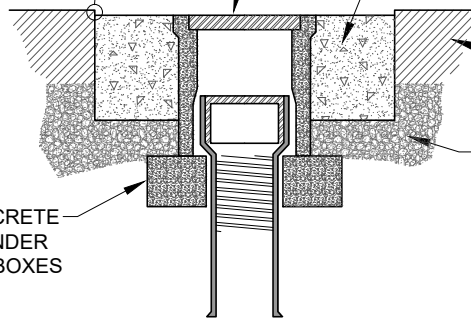

STANDARD CAST IRON LID MARKINGS

COVER COLLAR FOR WATER VALVE BOXES