


PROVIDE 4" THICK
CONCRETE PAD AS
REQUIRED BY
ENCLOSURE SIZE

PROVIDE LOCKING
PROTECTIVE SOLID
ENCLOSURE

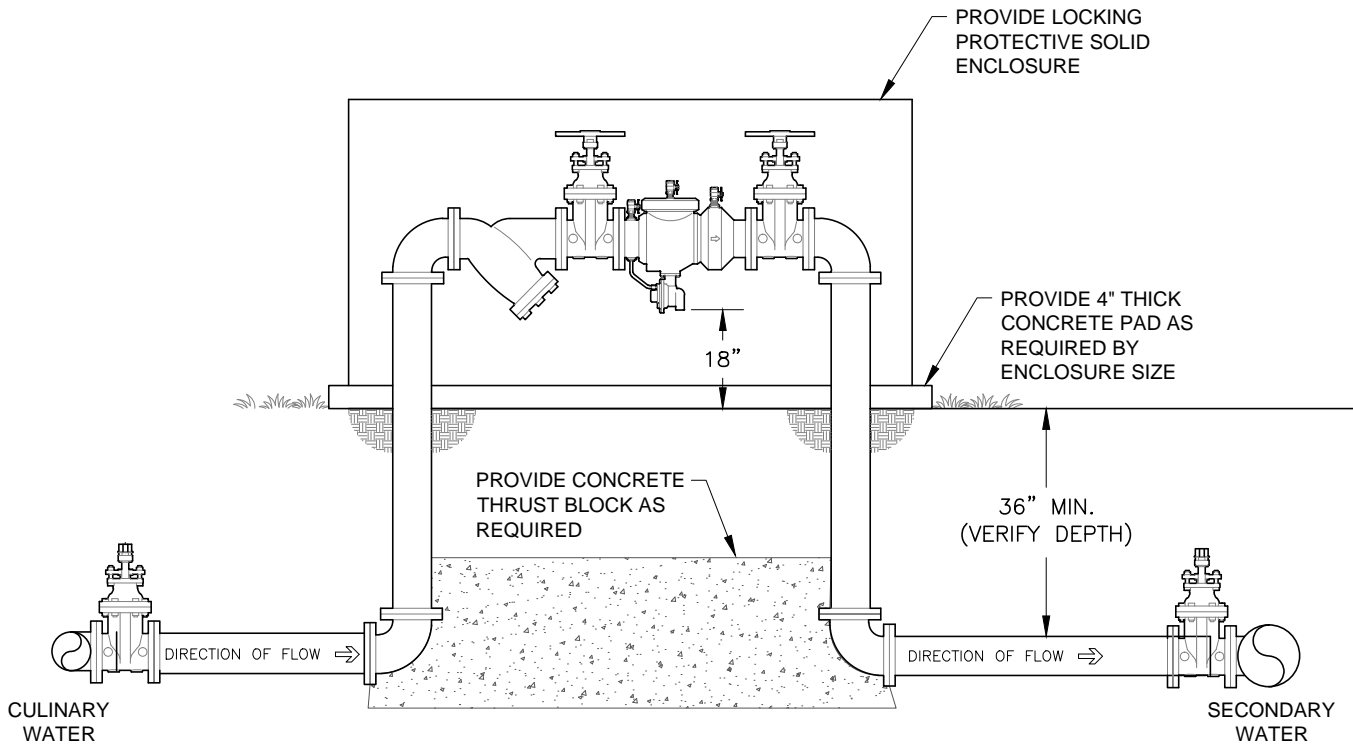

PROVIDE LOCKING
PROTECTIVE SOLID
ENCLOSURE

PROVIDE 4" THICK
CONCRETE PAD AS
REQUIRED BY
ENCLOSURE SIZE

PROVIDE CONCRETE
THRUST BLOCK AS
REQUIRED

36" MIN.
(VERIFY DEPTH)

WILKINS MODEL 375, FEBCO LF860
(OR APPROVED EQUAL)
REDUCED PRESSURE PRINCIPLE
ASSEMBLY